

Installation Instructions for JK Warrior 4DR Side Windows

Step One.

Start by securing D-Ring on side panel by back door latch, underneath the carpet. There is a pre-existing hole. Once installed, the d-ring should face towards the front of the jeep, tighten, and push carpet back, leaving only the d-ring exposed. Another option is that you can cut a small slit in the carpet and pull the d-ring through there.



Step Two.

Install the first two buckles on top as shown below.



Step Three.

Secure the next buckle working counterclockwise.




Step Four. 2007- 2010 Models

Secure the 4th buckle in the bottom corner. Bring the long strap thru the plastic seatbelt retractor box, bring around the front of the plastic and secure to buckle.



2011-2016 Models.

For 2011-2016 Models, Bring the long strap around the plastic seatbelt retainer box, bring the buckle end around the other way. Insert long strap through the built in d-ring on the floor of the cargo area, and connect to the buckle and pull tight.

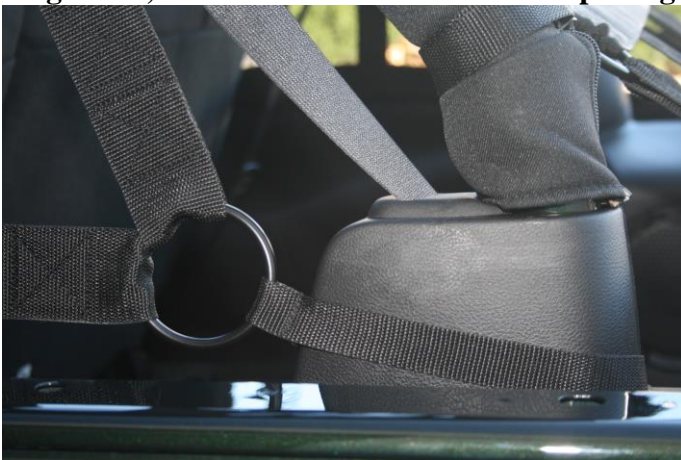

Step Five.

Secure the last buckle in the d-ring that you just installed by the door latch.



Now tighten and adjust all the straps on your side windows. Insert excess straps through slip keepers.