

# Installation Instructions for JK Warrior 4DR Window Set

## Step One.

Start by securing D-Ring on side panel by back door latch, underneath the carpet. There is a pre-existing hole. Once installed, the d-ring should face towards the front of the jeep, tighten, and push carpet back, leaving only the d-ring exposed. Another option is that you can cut a small slit in the carpet and pull the d-ring through there.



## Step Two.

Install the first two buckles on top as shown below.




## Step Three.

Secure the next buckle working counterclockwise.



**Step Four. 2007- 2010 Models**

Secure the 4<sup>th</sup> buckle in the bottom corner. Bring the long strap thru the plastic seatbelt retractor box, bring around the front of the plastic and secure to buckle.

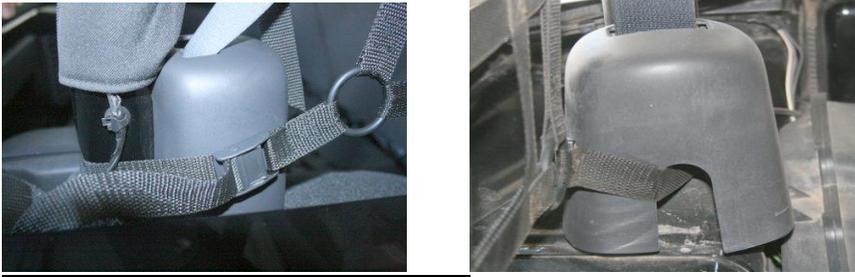

**For 2011- 2016 Models, Bring the long strap around the plastic seatbelt retainer box, bring the buckle end around the other way. Insert long strap through the built in d-ring on the floor of the cargo area, and connect to the buckle and pull tight.**



**2011- 2016 Models.**

**Step Five.**

Secure the last buckle in the d-ring that you just installed by the door latch.




Now tighten and adjust all the straps on your side windows

## **Back Window**

### **Step One.**

Attach the 2 top straps at the top. Do not tighten till the end.

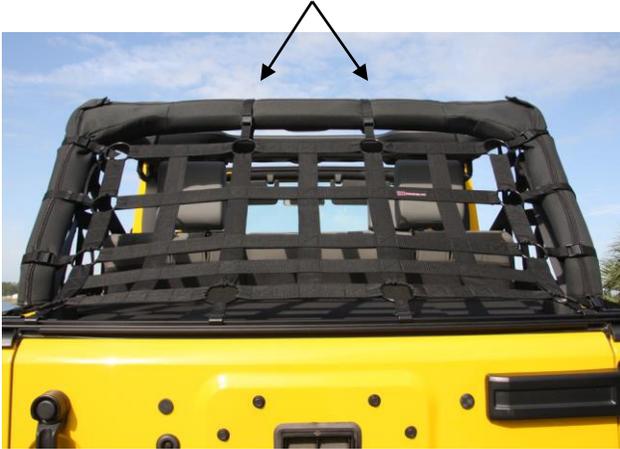

### **Step Two.**

Attach hooks in groove of tailgate bar.



### **Step Three.**

#### **2007 – 2010 Models**

Next, working your way up the back window, attach the hooks in the existing cut outs on the rail of your jeep. Do not tighten buckle just yet.



### 2011-2016 Models

For 2011- 2016 Models, insert snap hook in the hole on the side rail, then insert strap through the hook.



Attach the next strap around the roll bar just above the plastic seatbelt retainer box. Now adjust and tighten this strap on both sides. Then adjust and tighten the strap just below with the hook, both sides.

### Step Four

Attach the rest of the straps. Be sure to attach last strap above the seatbelt.



### Step Five.

Now you can tighten and adjust as needed. Insert excess straps through the slip keepers.

Note: If installed correctly, all labels should be facing out.  
You should always secure your gear with tie downs.

**Works with hard top on or off, Soft top up, down or off. If installing the hard top, unhook hooks from tailgate bar and remove hook in side of tub.**